
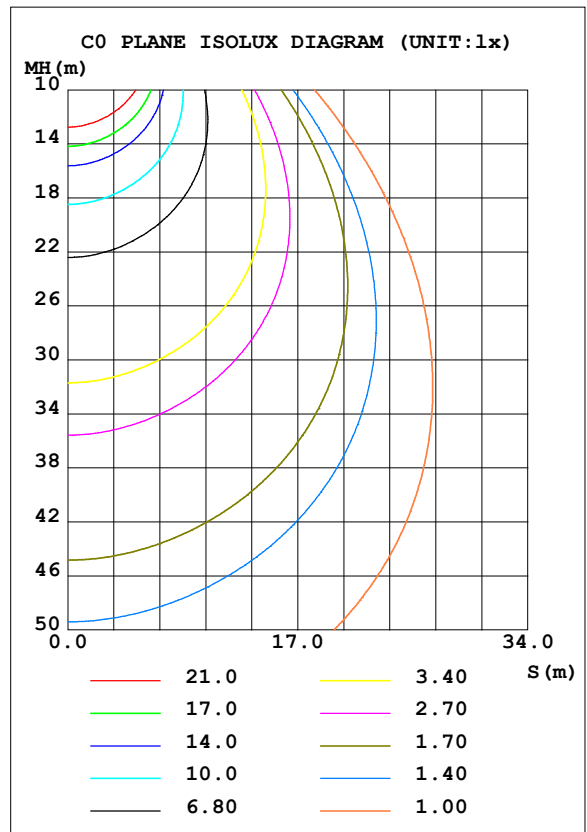


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.99V I:0.6621A P:78.862W PF:0.9927 Freq:59.98Hz Lamp Flux:7746.27x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:80W	DIM.: N/A	SERIAL No.:N/A
MFR.: LDPI Inc.,Ltd	SUR.:N/A	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 98.23 lm/W			
MODEL	LEXS-L2-V1-5-V110-D	Imax (cd)	3417	S/MH (C0/180)	1.24
NOMINAL POWER (W)	80	LOR (%)	100.0	S/MH (C90/270)	1.29
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	7746.3	η UP, DN (C0-180)	0.0, 46.4
NOMINAL FLUX (lm)	7746.27	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 53.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

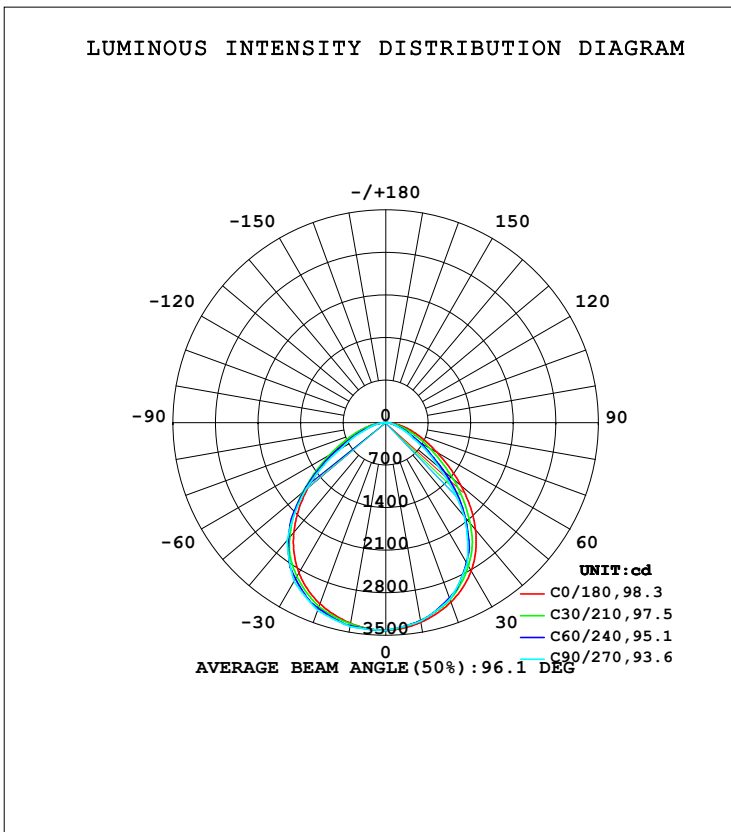

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CL
 Test Date:06 December 2018

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:6.010m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3334	3303	3319	3314	3350	3375	3404	3364	0- 10	322.1	322.1	4.16,4.16
20	3140	3069	3091	3088	3171	3225	3284	3203	10- 20	920.9	1243	16,16
30	2814	2690	2681	2718	2858	2956	3016	2921	20- 30	1386	2629	33.9,33.9
40	2298	2107	2012	2140	2354	2501	2526	2460	30- 40	1610	4239	54.7,54.7
50	1621	1356	1130	1390	1678	1804	1725	1763	40- 50	1488	5726	73.9,73.9
60	968.3	717.7	528.1	742.2	1005	1040	840.9	1020	50- 60	1067	6793	87.7,87.7
70	523.1	324.6	230.0	335.2	542.0	488.6	363.6	482.9	60- 70	614.0	7407	95.6,95.6
80	206.9	95.88	90.93	98.25	214.0	164.2	141.7	162.6	70- 80	286.2	7693	99.3,99.3
90	2.271	0	0	0	1.719	0	0	0	80- 90	52.97	7746	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 5021.8 lm

%lum = 64.8%

%lamp = 64.8%

Conical surface Flux(120deg): 6793.1 lm

%lum = 87.7%


%lamp = 87.7%

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CL
Test Date:06 December 2018

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.99V I:0.6621A P:78.862W PF:0.9927 Freq:59.98Hz Lamp Flux:7746.27x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:80W	DIM.: N/A	SERIAL No.:N/A
MFR.: LDPI Inc.,Ltd	SUR.:N/A	Shielding Angle:N/A

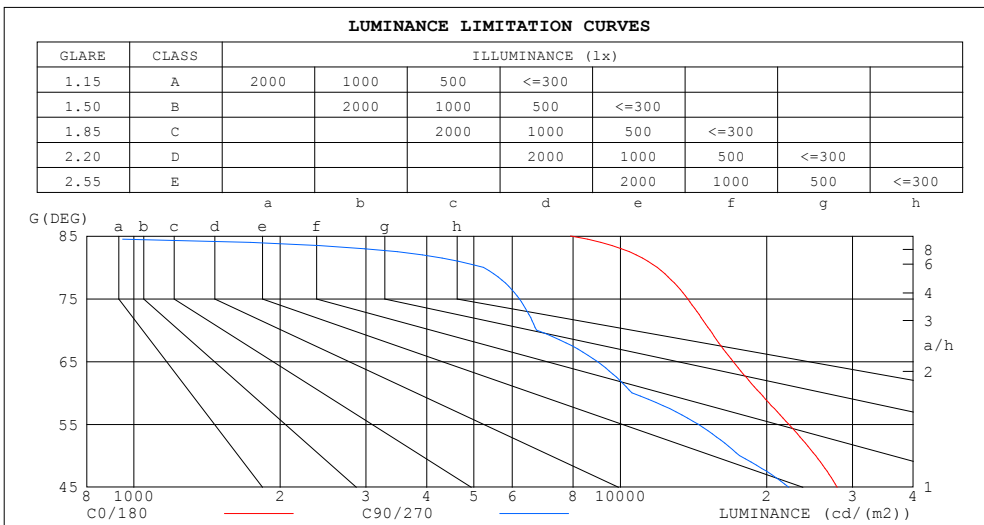

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7902	0
80	11913	5236
75	13752	6200
70	15295	6726
65	17051	8969
60	19365	10562
55	22203	14454
50	25213	17580
45	27907	22216


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CL
 Test Date:06 December 2018

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:6.010m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.99V I:0.6621A P:78.862W PF:0.9927 Freq:59.98Hz Lamp Flux:7746.27x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:80W	DIM.: N/A	SERIAL No.:N/A
MFR.: LDPI Inc.,Ltd	SUR.:N/A	Shielding Angle:N/A

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.03	.99	1.04	1.01	.98	.90	.97	.95	.96	.94	.92	.92	.91	.89	.87
2.0	.94	.88	.83	.92	.87	.82	.89	.84	.80	.86	.82	.79	.83	.80	.77	.75
3.0	.84	.77	.71	.82	.76	.70	.80	.74	.69	.77	.72	.68	.74	.70	.67	.65
4.0	.75	.67	.61	.74	.67	.61	.72	.65	.60	.69	.64	.59	.67	.62	.58	.56
5.0	.68	.60	.53	.67	.59	.53	.65	.58	.53	.63	.57	.52	.61	.56	.52	.50
6.0	.62	.53	.47	.61	.53	.47	.59	.52	.47	.57	.51	.46	.56	.50	.46	.44
7.0	.56	.48	.42	.55	.47	.42	.54	.47	.42	.52	.46	.41	.51	.45	.41	.39
8.0	.51	.43	.38	.51	.43	.38	.49	.42	.38	.48	.42	.37	.47	.41	.37	.35
9.0	.47	.40	.34	.47	.39	.34	.46	.39	.34	.45	.38	.34	.44	.38	.34	.32
10.0	.44	.36	.31	.43	.36	.31	.42	.36	.31	.41	.35	.31	.41	.35	.31	.29

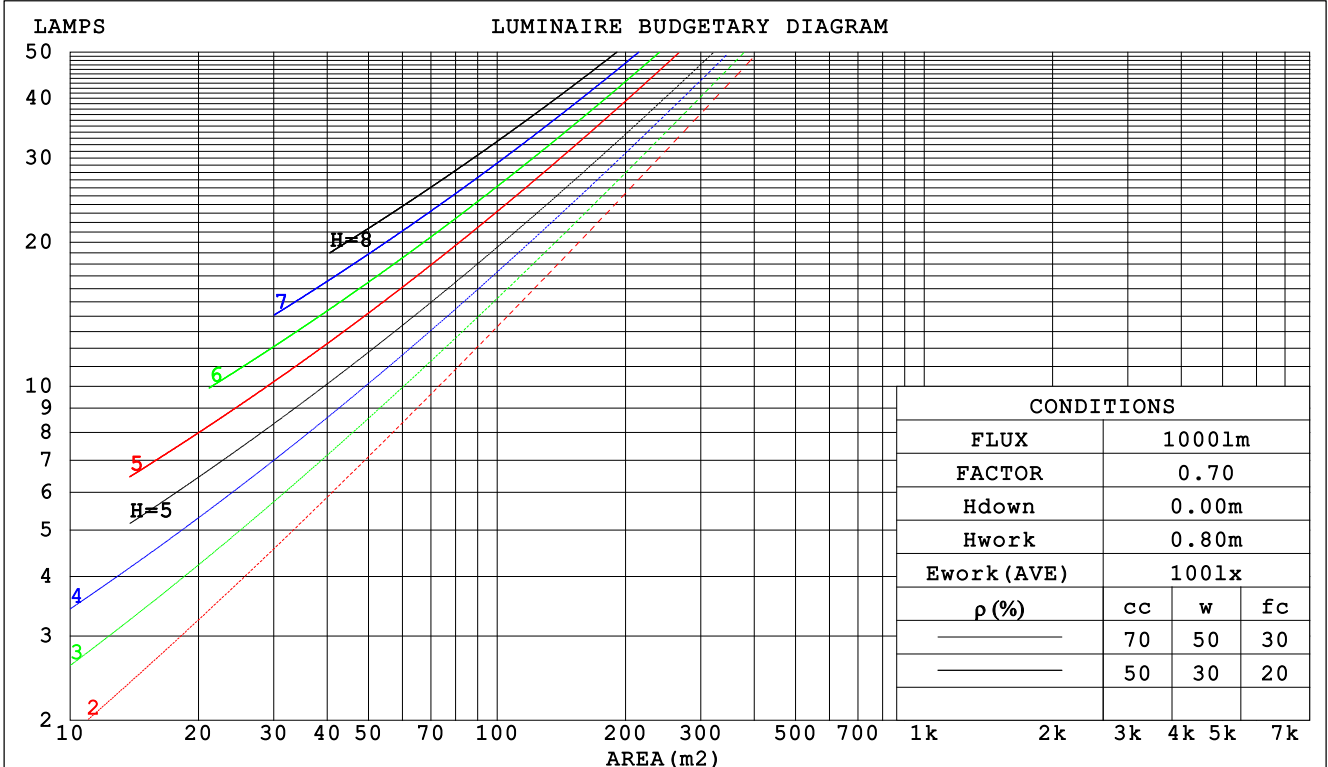

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CL
 Test Date:06 December 2018

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:6.010m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.99V I:0.6621A P:78.862W PF:0.9927 Freq:59.98Hz Lamp Flux:7746.27x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:80W	DIM.: N/A	SERIAL No.:N/A
MFR.: LDPI Inc.,Ltd	SUR.:N/A	Shielding Angle:N/A

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.264	.150	.048	.257	.147	.047	.244	.140	.045	.232	.134	.043	.221	.128	.041	
2.0	.255	.140	.043	.249	.137	.042	.237	.132	.041	.227	.127	.040	.217	.123	.039	
3.0	.240	.128	.038	.235	.126	.038	.225	.122	.037	.216	.118	.036	.207	.115	.035	
4.0	.225	.117	.034	.220	.115	.034	.212	.112	.034	.203	.109	.033	.196	.106	.032	
5.0	.211	.107	.031	.207	.106	.031	.199	.103	.030	.191	.101	.030	.185	.099	.030	
6.0	.197	.099	.028	.194	.098	.028	.187	.096	.028	.180	.094	.028	.174	.092	.027	
7.0	.185	.092	.026	.182	.091	.026	.176	.089	.026	.170	.087	.025	.164	.085	.025	
8.0	.174	.085	.024	.171	.084	.024	.166	.083	.024	.161	.081	.023	.156	.080	.023	
9.0	.164	.080	.022	.162	.079	.022	.157	.077	.022	.152	.076	.022	.148	.075	.022	
10.0	.155	.074	.021	.153	.074	.021	.148	.073	.020	.144	.072	.020	.140	.070	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.177	.157	.138	.152	.134	.119	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.167	.132	.102	.143	.114	.089	.098	.079	.062	.057	.046	.036	.018	.015	.012	
3.0	.159	.114	.078	.136	.098	.068	.093	.068	.048	.054	.040	.028	.017	.013	.009	
4.0	.151	.100	.062	.130	.087	.054	.089	.060	.038	.052	.035	.022	.017	.012	.007	
5.0	.144	.090	.050	.123	.078	.044	.085	.054	.031	.049	.032	.018	.016	.010	.006	
6.0	.137	.081	.041	.118	.070	.036	.081	.049	.026	.047	.029	.015	.015	.009	.005	
7.0	.130	.074	.035	.112	.064	.031	.077	.045	.022	.045	.027	.013	.015	.009	.004	
8.0	.124	.068	.030	.107	.059	.026	.074	.042	.019	.043	.025	.011	.014	.008	.004	
9.0	.119	.064	.026	.102	.055	.023	.071	.039	.016	.041	.023	.010	.013	.008	.003	
10.0	.113	.059	.023	.098	.051	.020	.068	.036	.014	.040	.021	.009	.013	.007	.003	

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CL
 Test Date:06 December 2018

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:6.010m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.99V I:0.6621A P:78.862W PF:0.9927 Freq:59.98Hz Lamp Flux:7746.27x1 lm										
NAME: LED Explosion-proof Flood Light					TYPE:Floodlight			WEIGHT:N/A		
SPEC.:80W					DIM.: N/A			SERIAL No.:N/A		
MFR.: LDPI Inc.,Ltd					SUR.:N/A			Shielding Angle:N/A		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.8	17.2	16.0	17.4	17.6	14.0	15.4	14.3	15.6	15.8
3H	16.8	18.0	17.1	18.3	18.5	14.4	15.7	14.7	15.9	16.1
4H	17.2	18.4	17.5	18.6	18.9	14.5	15.7	14.8	16.0	16.2
6H	17.5	18.6	17.8	18.9	19.1	14.6	15.7	14.9	16.0	16.3
8H	17.5	18.6	17.9	18.9	19.2	14.6	15.7	14.9	16.0	16.3
12H	17.6	18.6	17.9	18.9	19.2	14.6	15.6	14.9	15.9	16.2
4H 2H	15.9	17.1	16.2	17.4	17.6	14.4	15.6	14.7	15.9	16.1
3H	17.1	18.1	17.4	18.4	18.7	14.9	16.0	15.3	16.2	16.5
4H	17.6	18.5	17.9	18.8	19.2	15.1	16.1	15.5	16.4	16.7
6H	18.0	18.8	18.4	19.1	19.5	15.3	16.1	15.7	16.4	16.8
8H	18.1	18.9	18.5	19.2	19.6	15.3	16.1	15.7	16.4	16.8
12H	18.1	18.8	18.6	19.2	19.6	15.2	16.0	15.7	16.3	16.7
8H 4H	17.5	18.3	17.9	18.7	19.1	15.2	16.0	15.6	16.4	16.7
6H	18.0	18.6	18.4	19.0	19.5	15.5	16.1	15.9	16.5	16.9
8H	18.1	18.7	18.6	19.1	19.6	15.5	16.1	16.0	16.5	16.9
12H	18.2	18.7	18.7	19.1	19.6	15.5	16.0	16.0	16.4	16.9
12H 4H	17.5	18.2	17.9	18.6	19.0	15.2	15.9	15.6	16.3	16.7
6H	18.0	18.5	18.4	19.0	19.4	15.5	16.0	15.9	16.5	16.9
8H	18.1	18.6	18.6	19.1	19.5	15.5	16.0	16.0	16.5	16.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.6 / - 0.8				
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.6				
2.0H	+ 0.8 / - 0.8					+ 1.3 / - 1.4				

CIE Pub.117, 7746 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 7.1$)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CL
Test Date:06 December 2018

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.99V I:0.6621A P:78.862W PF:0.9927 Freq:59.98Hz Lamp Flux:7746.27x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:80W	DIM.: N/A	SERIAL No.:N/A
MFR.: LDPI Inc.,Ltd	SUR.:N/A	Shielding Angle:N/A


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	53	46	62	52	46	61	52	46	40
0.80	73	63	56	72	62	56	71	62	56	50
1.00	82	72	65	80	71	65	78	72	65	58
1.25	88	79	73	87	79	73	84	77	72	65
1.50	93	84	78	91	84	78	89	82	77	70
2.00	99	92	86	97	91	85	94	88	84	77
2.50	102	96	90	100	94	90	97	92	88	80
3.00	105	99	95	103	98	94	99	95	91	84
4.00	108	104	100	106	102	98	102	99	96	87
5.00	110	106	103	108	104	101	104	101	98	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHR NOM = 1.25			

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CL
Test Date:06 December 2018

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.99V I:0.6621A P:78.862W PF:0.9927 Freq:59.98Hz Lamp Flux:7746.27x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:80W	DIM.: N/A	SERIAL No.:N/A
MFR.: LDPI Inc.,Ltd	SUR.:N/A	Shielding Angle:N/A

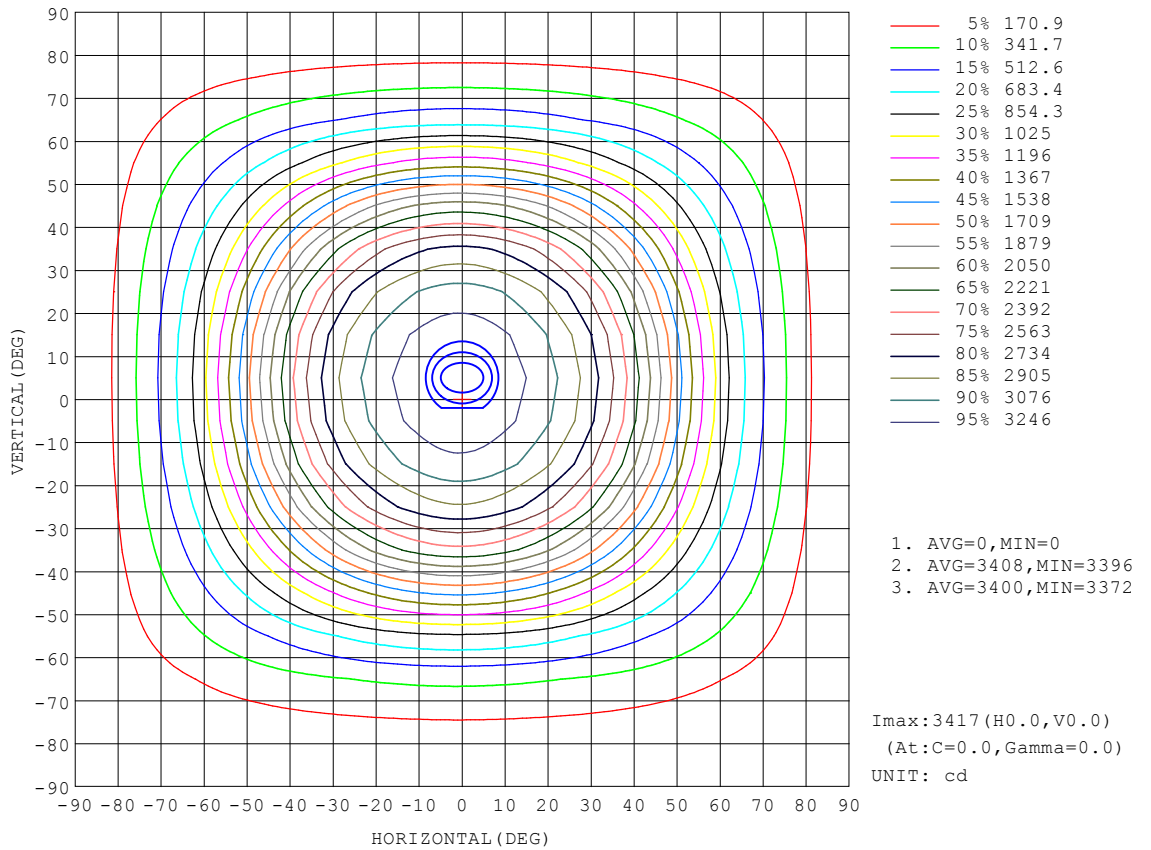


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CL
 Test Date:06 December 2018

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:6.010m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.99V I:0.6621A P:78.862W PF:0.9927 Freq:59.98Hz Lamp Flux:7746.27x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:80W	DIM.: N/A	SERIAL No.:N/A
MFR.: LDPI Inc.,Ltd	SUR.:N/A	Shielding Angle:N/A

Flux out:5315 lm

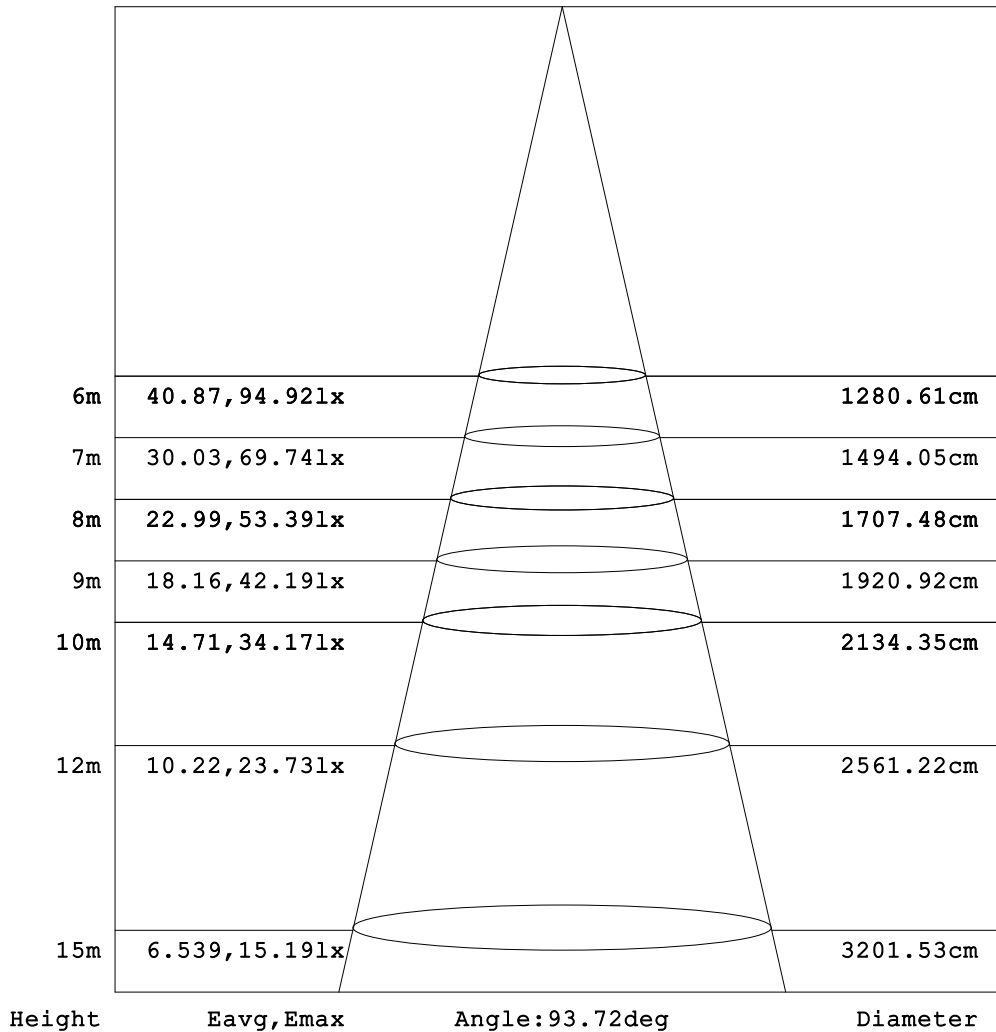


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CL
 Test Date:06 December 2018

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:6.010m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.99V I:0.6621A P:78.862W PF:0.9927 Freq:59.98Hz Lamp Flux:7746.27x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:80W	DIM.: N/A	SERIAL No.:N/A
MFR.: LDPI Inc.,Ltd	SUR.:N/A	Shielding Angle:N/A

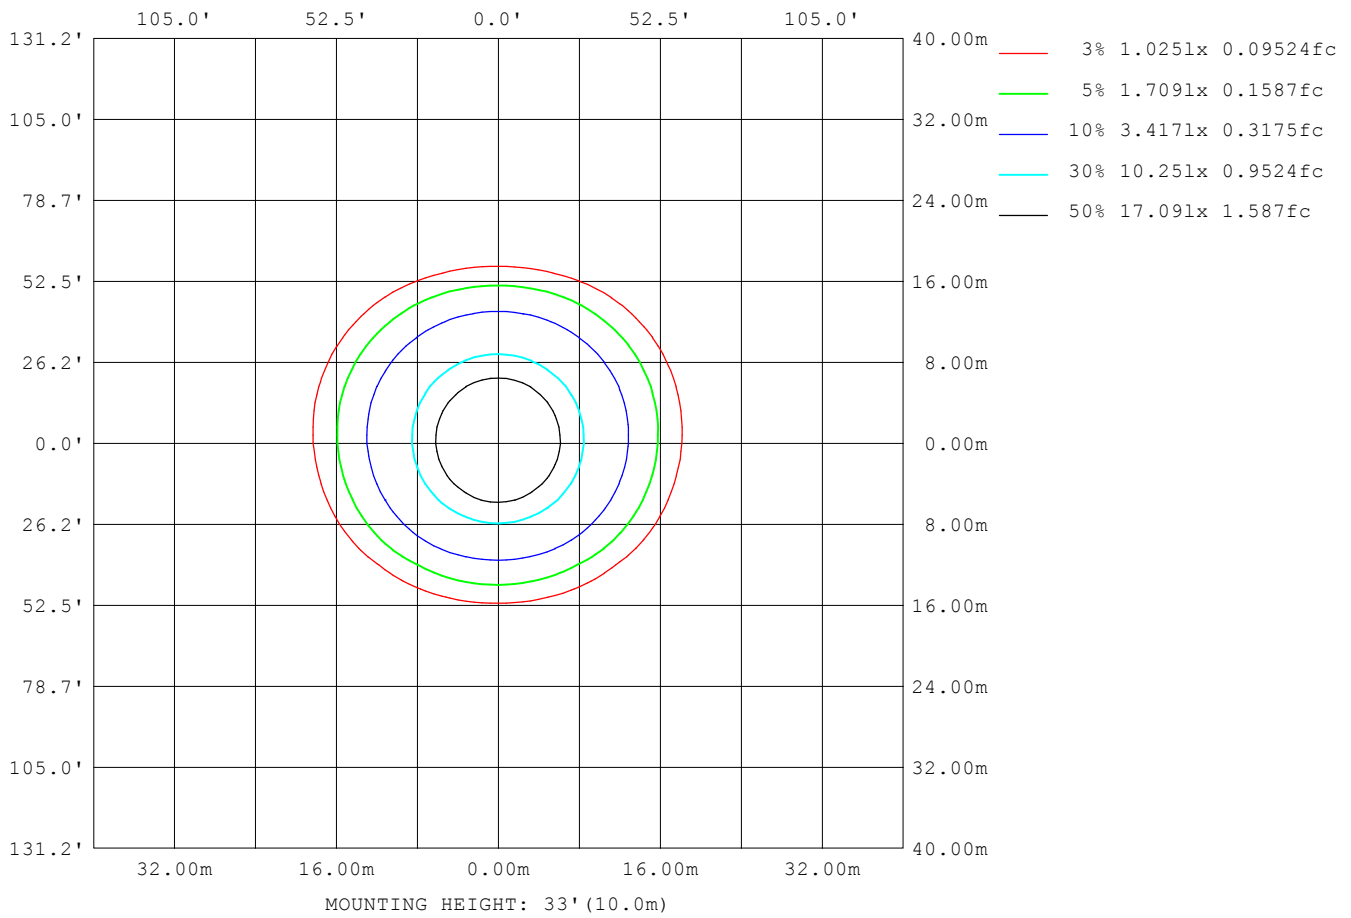

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CL
 Test Date:06 December 2018

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:6.010m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.99V I:0.6621A P:78.862W PF:0.9927 Freq:59.98Hz Lamp Flux:7746.27x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:80W	DIM.: N/A	SERIAL No.:N/A
MFR.: LDPI Inc.,Ltd	SUR.:N/A	Shielding Angle:N/A


AvgL	cd/m2
L_0~180 (65) av	17361
L_0~180 (75) av	13998
L_0~180 (85) av	8004
L_90~270 (65) av	11610
L_90~270 (75) av	7981
L_90~270 (85) av	0
L_45 (65) av	14674
L_45 (75) av	9105
L_45 (85) av	3473

Standard: GB/T 29293-2012

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:CL
Test Date:06 December 2018

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:6.010m [K=1.0000]
Remarks:

Planar Illuminance Curve

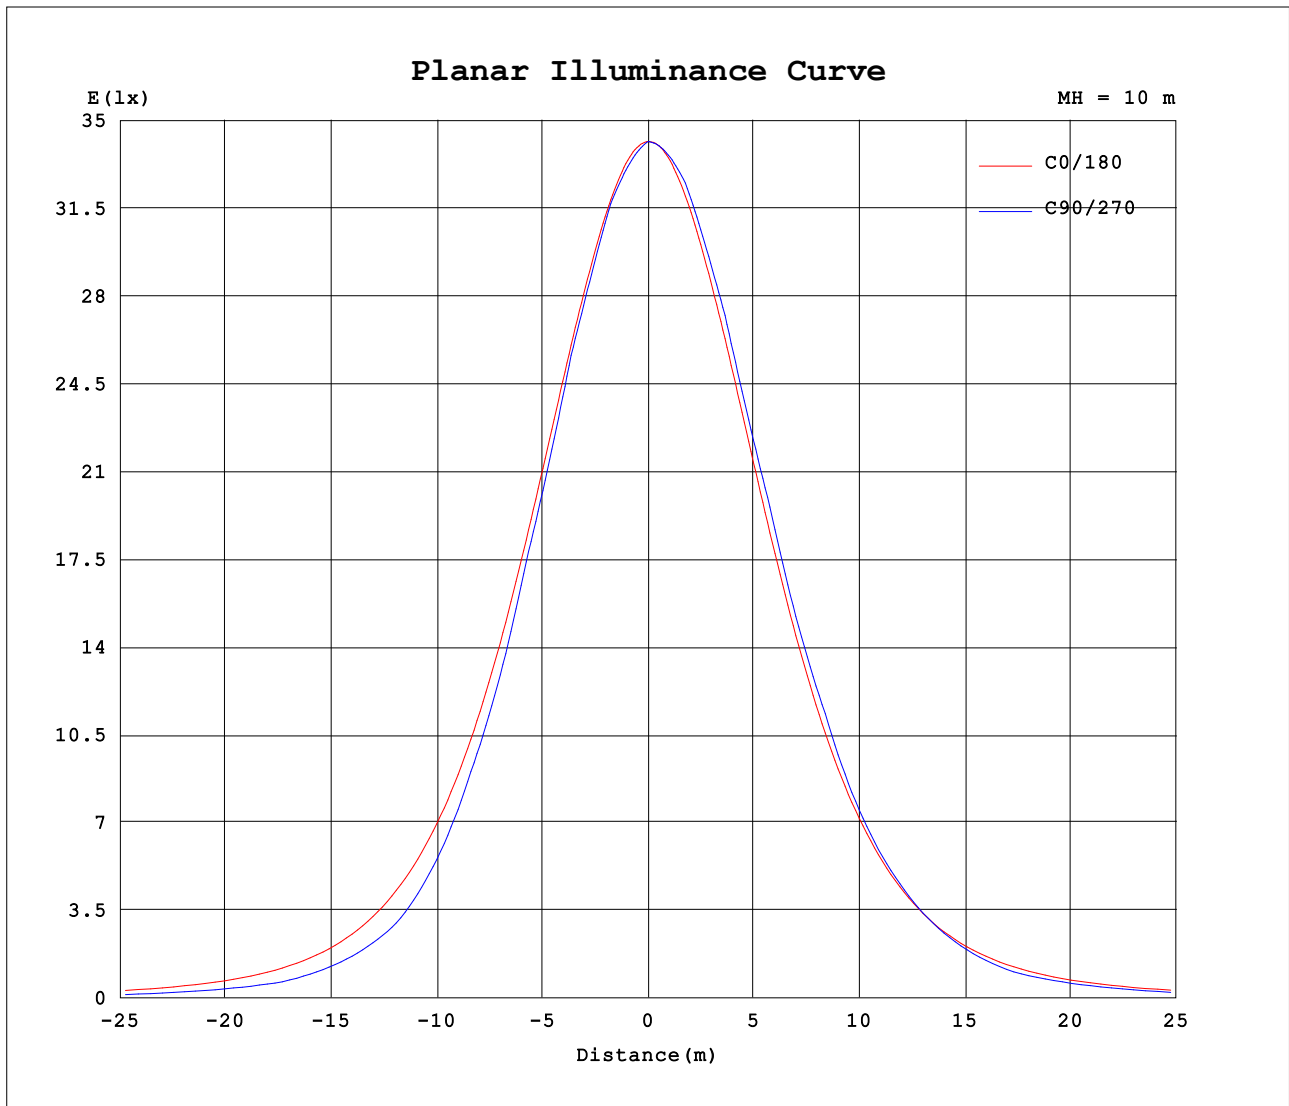

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CL
 Test Date:06 December 2018

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:6.010m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.99V I:0.6621A P:78.862W PF:0.9927 Freq:59.98Hz Lamp Flux:7746.27x1 lm		
NAME: LED Explosion-proof Flood Light	TYPE:Floodlight	WEIGHT:N/A
SPEC.:80W	DIM.: N/A	SERIAL No.:N/A
MFR.: LDPI Inc.,Ltd	SUR.:N/A	Shielding Angle:N/A

Table--4

UNIT: cd

C (DEG) γ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	3417	3417	3417	3417	3417	3417	3417	3417	3417	3417	3417	3417	3417	3417	3417				
5	3409	3408	3407	3405	3403	3401	3400	3398	3397	3396	3394	3394	3393	3393	3393				
10	3398	3394	3388	3383	3377	3370	3364	3358	3353	3347	3343	3339	3336	3335	3334				
15	3335	3330	3325	3319	3314	3309	3306	3302	3290	3279	3269	3262	3255	3251	3250				
20	3266	3256	3245	3233	3222	3212	3203	3196	3192	3189	3177	3163	3152	3144	3140				
25	3133	3125	3118	3112	3109	3104	3087	3072	3059	3051	3048	3038	3019	3005	2998				
30	2988	2974	2960	2947	2936	2927	2921	2922	2904	2884	2871	2865	2850	2828	2816				
35	2753	2748	2746	2747	2750	2728	2709	2696	2691	2684	2656	2639	2636	2605	2585				
40	2498	2484	2472	2461	2455	2454	2460	2443	2420	2407	2401	2369	2353	2335	2306				
45	2125	2130	2137	2145	2143	2126	2117	2116	2121	2090	2073	2061	2031	2024	1984				
50	1726	1729	1733	1739	1747	1756	1763	1749	1744	1746	1723	1707	1684	1667	1636				
55	1304	1317	1330	1341	1351	1363	1373	1380	1379	1374	1370	1350	1340	1312	1290				
60	880	906	935	963	988	1007	1020	1033	1042	1044	1039	1036	1018	1001	987				
65	613	622	633	644	657	691	723	745	757	767	770	767	763	751	738				
70	380	393	409	427	445	464	483	501	526	543	553	556	554	546	535				
75	254	256	259	263	268	274	290	314	335	354	370	381	383	379	368				
80	143	144	146	149	153	157	163	169	177	185	202	218	228	228	219				
85	4.74	8.35	12.9	18.3	24.5	31.2	38.1	45.0	51.5	57.2	64.7	73.1	78.3	85.9	82.9				
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:CL
 Test Date:06 December 2018

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity:65.0%
 Test Distance:6.010m [K=1.0000]
 Remarks: